



Eyal MAG Ltd.

Phone: 972-9-7499100 Fax: 972-9-7493669

Kibbutz Eyal D.N. Hasharon Hatichon 45840 Israel

Web: [www.eyal-mag.com](http://www.eyal-mag.com) Email: [emi@eyal-emi.com](mailto:emi@eyal-emi.com)




***28 Watt POWER AMPLIFIER  
WITH ANALOG PREDISTORTION LINEARIZER  
869 to 894 MHZ  
MODEL: LPA-4057-28***

**General Description of the Cellular Power Amplifier**

This preliminary document specifies a 28 Watt Cellular multicarrier Power Amplifier,  
Manufactured by **EYAL MAG LTD**,

**Features:**

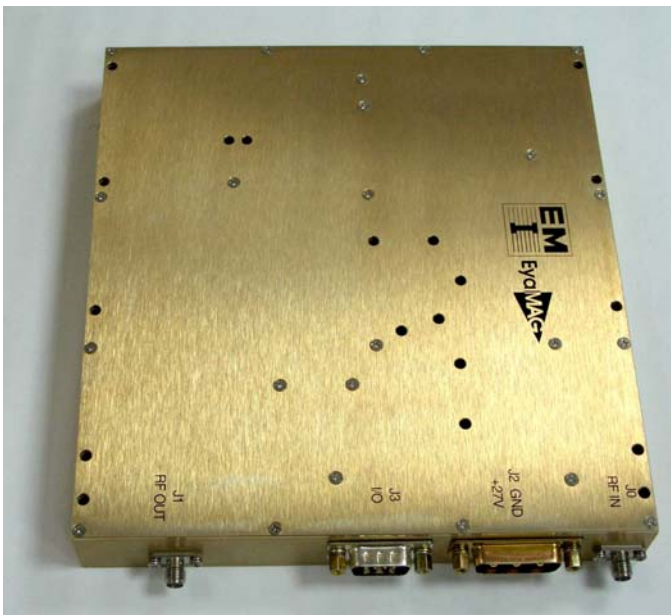

- **869÷894 MHz**
- **50 dB Gain**
- **28 W Output Power**
- **27 V DC Voltage Range**
- **- 20°C to +80°C Operating Temperature Range**
- **Alarms and interface per custom request**

**INTRODUCTION**

This catalog

- Summarizes guaranteed amplifier performance specifications.
- Provides typical performance data on some of our more popular models.
- Categorizes options to our standard catalog designs.
- Provides detailed outline drawings on all catalog models.



**Eyal MAG Ltd.**

Phone: 972-9-7499100 Fax: 972-9-7493669

Kibbutz Eyal D.N. Hasharon Hatichon 45840 Israel

Web: [www.eyal-mag.com](http://www.eyal-mag.com) Email: [emi@eyal-emi.com](mailto:emi@eyal-emi.com)



## **SPECIFICATION SUMMARY** **FOR PCS POWER AMPLIFIER 4057-28**

	<b>Specification</b>	<b>Note</b>
FREQUENCY RANGE	869÷894 MHz	
COMPOSITE AVERAGE OUTPUT POWER	44.5dBm	(28.0W)
GAIN	50 dB	± 1 dB
GAIN FLATNESS OVER FREQUENCY	± 0.75 dB	Max.
INPUT / OUTPUT VSWR	1.5:1	Max.
DC INPUT VOLTAGE	27V dc	
DC INPUT CURRENT	10A Max.	@ Pout = 28W
ABS Power at ± 3.125MHz, 28W 3 Carriers CDMA IS-95C	-13dBm / 100kHz	+ 25°C
IMD at +/- 750 kHz offset 28W, 3 carriers CDMA IS – 95C	-45dBc / 30kHz	+ 25°C
IMD at +/- 1.98 MHz offset 28W 3 carriers CDMA IS – 95C	-60dBc / 30kHz	+ 25°C

### **ALARMS AND SIGNAL**

ALARMS, FUNCTIONS	AUTO RECOVERY	No te
Overpower alarm at 47 dBm, 3 CDMA Carriers	Yes	
Reflected power alarm at 36-37 dBm, 3 CDMA Carriers	Yes	
Temperature Monitor, 500 mV+10mV / °C	Yes	
Over temperature alarm, 86°C	Yes	±2 °C
Enable, active LOW	Yes	
Forward Power Monitor	2.4 ± 0.05V at 33dBm 4.8 ± 0.05V at 46 dBm	
Overpower shutdown	47 – 48 dBm	

### **PROTECTION SHUTDOWN**

Internal Temperature > 85°C, auto restart at 75°C	Yes	±2°C
Overpower at 47-48 dBm; enable to restart	Yes	
Over voltage 28.5V	Yes	